

The image features a futuristic, high-tech aesthetic. In the foreground, there are two large, dark, rectangular solar panels with a metallic, reflective surface. The background is a deep blue with intricate, glowing circuit patterns in a lighter blue and red. The overall composition is clean and modern, emphasizing advanced technology.

Puma
SERIES

**SHINGLED
TECHNOLOGY**

SUPERIOR PERFORMANCE
AND RELIABILITY

RECOM
TECHNOLOGIES®

SHINGLED TECHNOLOGY

Over 420Wp & Over 675Wp



ADVANTAGES OF PUMA SHINGLED MODULES

REDUCED RISK OF MICRO CRACKS

The replacement of soldered ribbons with a low temperature and flexible ECA decreases thermal stresses during the modules production and operation, decreasing the risk of micro cracks formation.

Mechanical stresses (e.g. snow load) are relieved by the flexible interconnection, improving the reliability in harsh environments (as reflected in the increased warranty provided).

HIGHER CELLS DENSITY AND IMPROVED AESTHETICS

The inactive area is considerably reduced, no ribbons and cells gaps on strings improving the efficiency and aesthetic in full black modules.

LOWER RESISTIVE LOSSES AND THERMAL COEFFICIENT

The resistive losses in strings are considerably decreased thanks to the lower current of shingles (1/6 or 1/7 of the original cell) and the lack of interconnection ribbons in strings, improving at the same time the performance at high temperatures.



Higher yield per surface area



Higher yield in hot climate



Low Pmax at - 0,34 % / °C



MONO CRYSTALLINE SHINGLED MODULE

KEY BENEFITS



25 Years product warranty



87,2% performance output warranty after 25 years



Over 20Wp more compared to standard modules



Reduced transportation costs



Reduced Risk Of Micro Cracks



Module efficiency up to 21,7%

PERFORMANCE AT HIGH TEMPERATURES



HIGHER OUTPUT IN HOT CLIMATE

+ 0,9 % Specific yield (kWh/kWp) due to low temperature coefficient



MORE EFFICIENT SPACE UTILIZATION

- 3,1 % Space required for 1MWp of PUMA modules



HIGHER GENERATION PER UNIT AREA

+ 4,1 % PV plant yield /sq.m. in hot climate

PEAK POWER
Up to 675Wp

MODULE EFFICIENCY 21,7%

TEMPERATURE RATIO - 0,34 %/°C


SMALL SIZE FOR ROOF TOP INSTALLATION

The PUMA module with power class over 555Wp, efficiency up to 21,6% and 25 years product & up to 30 years output warranty is:

- Best "Value for money" choice
- Ideal for rooftop installations (in the same size of the rooftop, more power can be installed compared to standard modules)
- Low LCOE

FOR COMMERCIAL & UTILITY INSTALLATIONS

The PUMA module with power class up to 675Wp, efficiency up to 21,7% and 25 years product & output warranty.

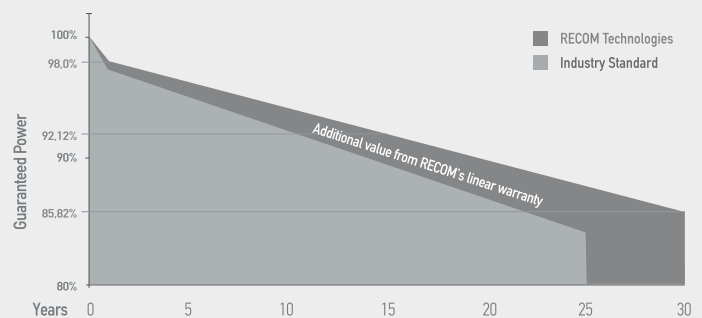

First Year Output | $\geq 98.0\%$ 2-30 Year Decline | $\leq 0.42\%$ 30 Year Output | $\geq 85.82\%$

Great appearance

BLENDS PERFECTLY WITH THE ROOFTOP





SHINGLED TECHNOLOGY



EUROPEAN MANUFACTURER

WWW.RECOM-TECH.COM



CYPRUS

1 Avlonos Street,
Nicosia, 1075
Cyprus
T: +357 22 008009
E: info@recom-tech.com

FRANCE

4 Avenue
Pierre Marzin
22300 Lannion, France
T: +33 0296058050
E: contact@recom-sillia.com

GERMANY

Speditionstraße 21
Düsseldorf,
40221, Germany
T: +49 211 88231669
E: info@recom-tech.com

GREECE

1 Poseidonos Str.
17342, Ag. Dimitrios
Athens, Greece
T: +30 2182189858
E: info@recom-tech.com

ITALY

Via dell' Artigianato, Z. I.,
Vanzo di San Pietro
Viminario,
PD 35020, Italy
E: info@recom-tech.com

SINGAPORE

Level 39, Tower 2
Marina Bay Financial Centre
10 Marina Boulevard
018983 Singapore
T: +65 68186030
E: info@recom-tech.com

U.A.E.

Office 801, Twin Towers,
Baniyas Street, Dubai, United
Arab Emirates. P.O.Box 41423,
T: +971(4)2678443
E: info@recom-tech.ae

UK

3 & 5 Hospital Approach,
Chelmsford, Essex
CM1 7FA
T: +44 01245 440302
E: info@recom-tech.co.uk

USA

580 California Street,
12th & 16th Floors
San Francisco,
California, CA 94104
T: +1 (561) 388 1003
E: info@recom-tech.com