


# Lion

SERIES

HETEROJUNCTION  
TECHNOLOGY

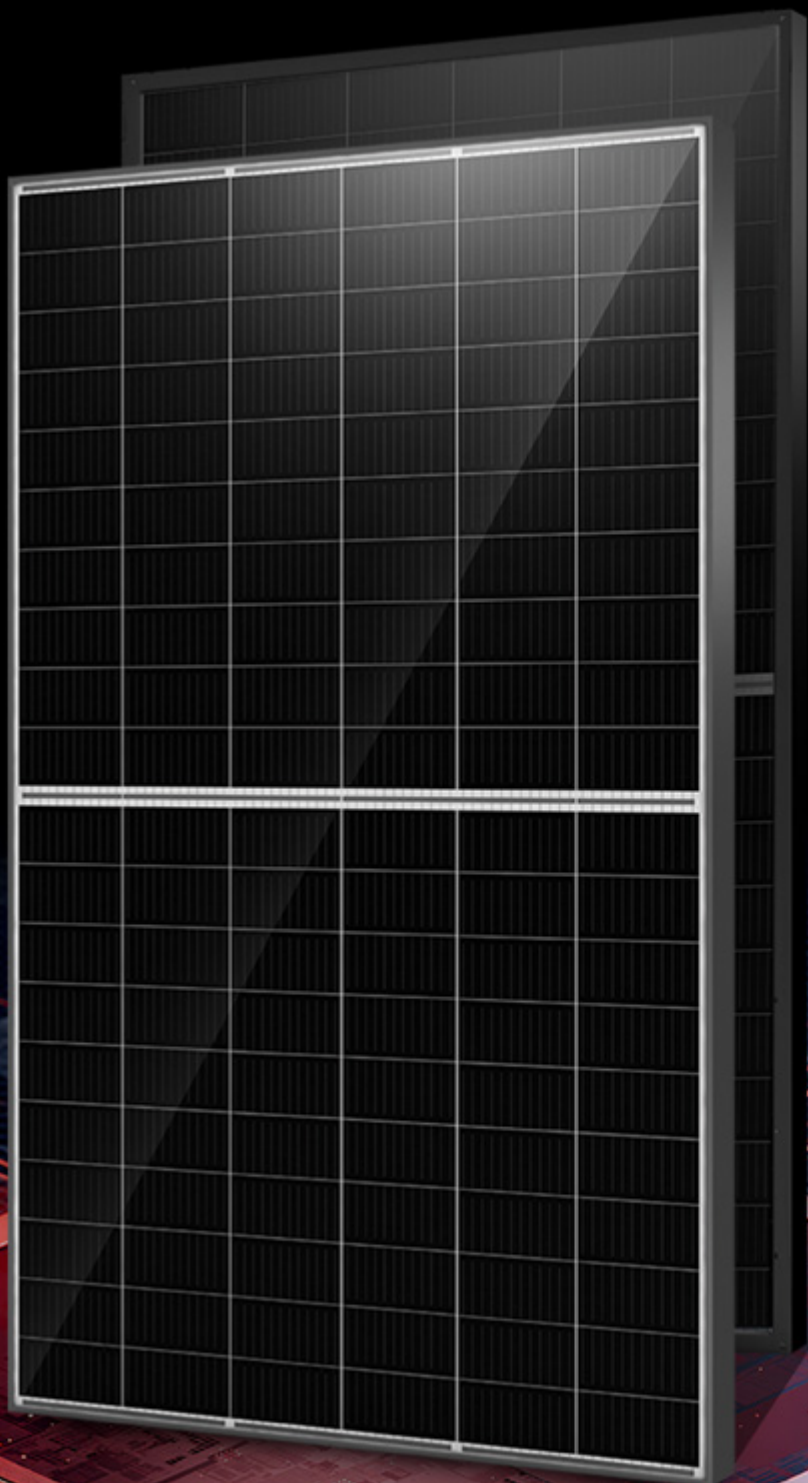

THE TECHNOLOGY  
OF THE FUTURE TODAY


**RECOM**<sup>®</sup>  
TECHNOLOGIES

**HETEROJUNCTION TECHNOLOGY**

From 430Wp & up to 750Wp



**ADVANTAGES OF LION HETEROJUNCTION MODULES**



**Up to 24,1%  
Module  
Efficiency**

**HIGH EFFICIENCY**

In STC condition, due to the Tandem technology, HJT modules have higher efficiency at least by 1% compared to other technologies. HJT is active on both UV and infrared wavelengths and has a higher light output.

**NO LID&PID**

HJT has no power loss against 1% first year (LID) and up to 5% after with PID syndrome in standard mono perc module.

Heterojunction (HJT) photovoltaic module is a ground breaking technology. HJT technology guarantees high performance and low degradation of the PV module, substantially improving results and yield over time.

Lion series reaches over 750Wp power, 7% higher compared to standard PV modules.



Low temperature  
coefficient



High energy yield



Low degradation



## KEY BENEFITS



Up to 24,1%  
Module  
Efficiency



≥ 90% Output  
After 30 Years



Low Temperature  
Coefficient  
-0,24% /°C



High  
Bifaciality



No LID & PID



10% - 35% Power  
Generation Gain

## PERFORMANCE AT HIGH TEMPERATURES



HIGHER OUTPUT  
IN HOT CLIMATE

**+ 1,8%** Specific yield (kWh/kWp) due  
to low temperature coefficient



MORE EFFICIENT  
SPACE UTILIZATION

**- 6,3%** Space required for 1MWp  
of LION modules



HIGHER  
GENERATION  
PER UNIT AREA

**+ 5,9%** PV plant yield /sq.m.  
in hot climate



HIGHER  
BIFACIAL FACTOR

**+ 4,0%** Project installed with  
sand soil albedo



LOWER  
POWER LOSS

**+ 5,6%** PV plant yield in  
30 years of using

### LOW DEGRADATION


Lion series modules use HJT cell technology, which have lower degradation than Mono PERC panels.

More stable and sustainable electricity production.

Power yield ≥ 95% after 15 years, ≥ 92,5% after 25 years and ≥ 90% after 30 years.

### HIGHER PERFORMANCE

Gain up to 20% more energy yield, in low-light conditions, in the morning and evening hours and during cloudy skies.

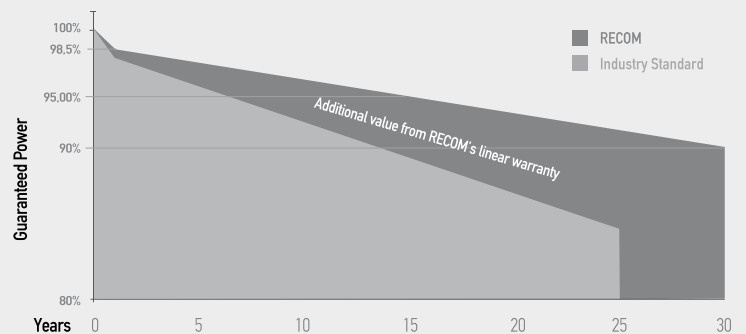

First Year Output | ≥ 98.5%    2-30 Year Decline | ≤ 0.25%    30 Year Output | ≥ 90%

**Great Appearance**

**BLENDS PERFECTLY  
WITH THE ROOFTOP**





WWW.RECOM-TECH.COM

## SOLAR ASSOCIATION MEMBERSHIPS



SolarPower  
Europe  
Member

### CYPRUS

1 Avlonos Street,  
Nicosia, 1075  
Cyprus  
T: +357 22 008009  
E: info@recom-tech.com

### FRANCE

4 Avenue  
Pierre Marzin  
22300 Lannion, France  
T: +33 0296058050  
E: contact@recom-sillia.com

### GERMANY

Königsallee 2B, 40212,  
Düsseldorf, Germany  
T: +49 211 30297156  
E: info@recom-tech.com

### GREECE

1 Poseidonos Str.  
17342, Ag. Dimitrios  
Athens, Greece  
T: +30 2182189858  
E: info@recom-tech.com

### ITALY

Office: Foro Buonaparte 12,  
Milano, Italy CAP 20121  
Factory: Via dell' Artigianato,  
San Pietro Viminario, Padova,  
Italy CAP 35020  
T: +39 0287362495  
E: info@recom-tech.com

### SINGAPORE

Level 39, Tower 2  
Marina Bay Financial Centre  
10 Marina Boulevard  
018983 Singapore  
T: +65 68186030  
E: info@recom-tech.com

### U.A.E.

Office 801, Twin Towers,  
Baniyas Street, Dubai, United  
Arab Emirates. PO.Box 41423,  
T: +971(4)2678443  
E: info@recom-tech.ae

### UK

3 & 5 Hospital Approach,  
Chelmsford, Essex  
CM1 7FA  
T: +44 01245 440302  
E: info@recom-tech.co.uk

### USA

580 California Street,  
12th & 16th Floors  
San Francisco,  
California, CA 94104  
T: +1 (561) 388 1003  
E: info@recom-tech.com